Dublin Airport Air Quality Monitoring Q1 2025

Sustainability

September 2025



Dublin Airport Air Quality Monitoring Quarter 1 Report 2025



Contents

1.0	Intro	duction	4
1.1	Ва	ckground	4
1.2	Pu	rpose	4
2.0	Mon	toring Locations	7
3.0	Para	meters and Sampling Methodology	9
3.1	Off	site Passive Sampling:	9
	3.1.1	Nitrogen Dioxide (NO ₂) and Benzene (C ₆ H ₆)	9
3.2	On	site Sampling	9
	3.2.1	Equipment Calibration	9
	3.2.2	Nitrogen Dioxide (NO ₂)	9
	3.2.3	Particulate Matter (PM ₁₀) and (PM _{2.5})	9
4.0	Moni	itoring Results	10
4.1	Off	site NO ₂ Monitoring Results	10
4.2		site Benzene Monitoring Results	
5.0		ite Airport Monitoring Station Results	
5.1	On	-site Airport Monitoring Station Results: Daily Average NO ₂	13
5.2	On	-site Airport Monitoring Station Results: PM ₁₀	14
5.3		-Site Airport Monitoring Station Results: PM _{2.5}	
6.0		clusion	
Fig	ures		
_		Quality Monitoring Locations	8
Fig	ure 2 Av	verage Monthly NO ₂ Concentrations Q1 2025	11
_		verage Monthly Benzene (C ₆ H ₆) Concentrations Q1 2025	
		aily Average NO ₂ Q1 2025	
		aily Average PM ₁₀ Q1 2025	
		aily Average PM _{2.5} Q1 2025	

Tables

Table 1 EU limits and WHO Air Quality target values	5
Table 2 Community ambient air quality monitoring locations	7
Table 3 PM ₁₀ and PM _{2.5} Limit Values	16

Glossary

WHO

Abbreviation	Definition
AQG	Air Quality Guidelines
DAP	Dublin Airport
CAFE	Cleaner Air for Europe
EPA	Environmental Protection Agency
NO	Nitrogen Oxide
NO ₂	Nitrogen Dioxide
NOx	Oxides of Nitrogen
PM ₁₀	Airborne particulate Matter, particle size less than 10 micron.
PM _{2.5}	Airborne particulate Matter, particle size less than 2.5 micron.
The Regulations	Ambient Air Quality Standards Regulations 2011

World Health Organisation

Version Control

Issue No	Prepared by	Reviewed by	Date
GST_REP_25002	Environmental Officer	Sustainability	September 2025

Executive Summary

daa undertakes a programme of air quality monitoring at Dublin Airport (DAP) and in surrounding communities. Monitoring is undertaken using a stationary continuous air monitoring station located within the DAP boundary. Air quality is also monitored at 11 locations within and outside the airport boundary using passive diffusion tube sampling.

This report provides an overview of the results of air quality monitoring undertaken by daa at DAP and environs in Q1 2025. Air monitoring locations are listed in Table 2 and presented as Figure 1 of this report.

The Ambient Air Quality Standards Regulations 2011 (the Regulations), S.I. No. 180 of 2011, implement EU Directive 2008/50/EC on Cleaner Air for Europe (CAFE). The Regulations are referred to in this report for comparison purposes only. There is no requirement under the Regulations for individual companies or operators to carry out air monitoring. In Ireland, compliance with the Regulations is the responsibility of the Environmental Protection Agency (EPA), which is deemed to be the competent authority for the purpose of Directive 2008/50/EC. The EPA is required to submit an annual Air Quality report to the Minister of the Environment, Climate and Communications and to the European Commission. The latest EPA Report entitled "Air Quality in Ireland 2024" was published in September 2025 and is available on the EPA Website.

World Health Organisation (WHO) published updated Air Quality Guidelines (AQG) in 2021 based on the impact of air pollutants on health. The 2023 <u>Clean Air Strategy for Ireland</u> commits Ireland to meeting WHO AQGs by 2040 and outlines interim targets towards achieving final AQG levels to be met by 2026 and 2030. A revised CAFE Directive (EU 2024/2881) was published in 2024 introducing new regulatory limit values to be achieved by 2030. The WHO targets and upcoming regulatory limit values are included on graphs displaying air quality monitoring results within this report.

This report highlights the air quality levels around Dublin Airport from January to March 2025. The results of the NO_2 , PM_{10} and $PM_{2.5}$ concentrations using the online analyser indicate concentrations are below the relevant annual limit values of $40\mu g/m^3$ and $20\mu g/m^3$ respectively and within the allowed criteria of short-term limit values. The diffusion tube results for NO_2 and benzene (C_6H_6) are with the annual limit values of $40\mu g/m^3$ and $5\mu g/m^3$ respectively. The highest average NO_2 concentrations were recorded at the Dublin Airport bus depot which experiences significant vehicular activity.

In collaboration with the EPA, the Dublin Airport continuous air quality monitoring station data is provided to the EPA on a continuous basis. As part of daa's transparency, daa air quality monitoring station can be viewed on the EPA website: https://www.epa.ie/air/quality/.

1.0 Introduction

1.1 Background

Dublin Airport (DAP) is located approximately 10 km north of Dublin city. The areas to the west of the airport are predominantly rural in nature. The airport is surrounded by Swords Village to the north and Santry to the south. The airport is bounded on two sides by the two busiest motorways in the country: the M1 and the M50. The M1 motorway is approximately 1km east of the current location of the airport's onsite air quality monitoring station and the M50 motorway is approximately 2.5 km south of the monitoring location.

1.2 Purpose

The purpose of this report is to present an overview of the results of air quality monitoring conducted onsite at DAP and at 11 monitoring locations in the vicinity of the airport in Q1 2025. The Ambient Air Quality Standards Regulations 2011, S.I. No. 180 of 2011 (the Regulations), implement EU Directive 2008/50/EC on Ambient Air Quality and Cleaner Air for Europe. This report compares the data collected during the daa monitoring programme with limit values contained in the Regulations to assess air quality at each monitoring location. Since Q3 2023 the latest World Health Organisation (WHO) Air Quality Guidelines (AQGs) and interim targets outlined in the Clean Air Strategy for Ireland are also presented in this report.

In Q4 2024 a revised CAFE Directive (EU 2024/2881) entered into force which introduces new air quality limit standards to be achieved by 2030 that align more closely with the WHO AQG. The revised CAFE Directive has not yet been transposed into Irish Legislation. Upcoming EU limit values and WHO target values for NO₂, PM_{2.5}, and PM₁₀ are presented in Table 1.

Pollutant	Averaging time	unit	Current EU limit	2030 EU limit value	WHO inte	erim and fina	l targets (IT)
			value		IT3 (2026)	IT4 (2030)	Final AQG (2040)
NO ₂	Annual	μg/m³	40	20	20	20	10
PM ₁₀	Annual	μg/m ³	40	20	30	20	15
PM _{2.5}	Annual	μg/m ³	20	10	15	10	5
Benzene	Annual	μg/m ³	5	3.4	-	-	-

Table 1 EU limits and WHO Air Quality target values

The Regulations, revised CAFE Directive and Ireland's Clean Air Strategy are referred to in this report for comparison and reference purposes only. There is no requirement under the Regulations that companies or operators shall carry out air quality monitoring. In Ireland, compliance with the Regulations is the responsibility of the Environmental Protection Agency (EPA), which is deemed to be the competent authority.

A range of parameters are recorded at DAP's continuous on-site monitoring station as follows:

- Sulphur dioxide (SO₂)
- Oxides of nitrogen NO_x (NO and NO₂)
- Carbon monoxide (CO)
- Ozone (O₃)
- Particulate Matter (PM₁₀)
- Particulate Matter (PM_{2.5})

Diffusion tube samplers located in communities surrounding the airport monitor the following gases:

- Nitrogen Dioxide (NO₂)
- Sulphur dioxide (SO₂)
- Benzene
- Ethylbenzene
- m- and p-Xylene
- o-Xylene
- Toluene
- Ozone

The results of air quality monitoring for all of the above parameters are reviewed by daa on a continuous basis.

To date and in line with air quality reporting at many airports, daa has focussed reporting on the most important parameters:

- Nitrogen Dioxide (NO₂) and Particulate Matter (PM₁₀) at the DAP automatic station;
 and
- Nitrogen Dioxide (NO₂) and Benzene using diffusion tubes at 11 offsite locations.

2.0 Monitoring Locations

A list of the ambient air quality sampling locations is presented in Table 2. Sampling locations are presented as Figure 1.

Ref	Location	Method	Parameter
On-site	Dublin Airport.	Continuous analyser	NO ₂ PM ₁₀ PM _{2.5}
A1	Forrest Little Golf Club.	Passive Tubes	
A2	Kilreesk Lane, St. Margaret's.	Passive Tubes	
А3	Ridgewood Estate West, Swords.	Passive Tubes	
A4	St. Margaret's School and Parish	Passive Tubes	No
A 5	Fire Station, Huntstown, Dublin Airport.	Passive Tubes	NO₂ Benzene
A6	Southern Boundary Fence, Dublin	Passive Tubes	
A7	Western Boundary Fence, Dublin Airport	Passive Tubes	
A8	St. Nicholas of Myra School, Malahide Road.	Passive Tubes	
А9	Naomh Mearnóg GAA Club, Portmarnock.	Passive Tubes	
A10	Oscar Papa Site, Portmarnock.	Passive Tubes	
A11	Dublin Airport Bus Depot	Passive Tubes	

 Table 2 Community ambient air quality monitoring locations

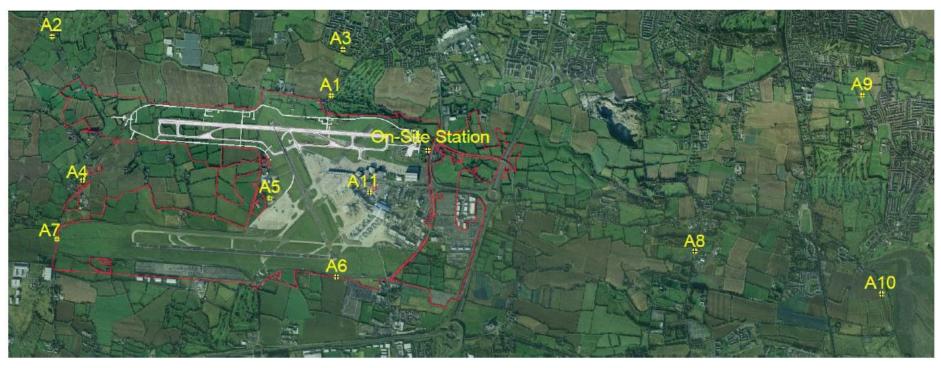


Figure 1 Air Quality Monitoring Locations

3.0 Parameters and Sampling Methodology

3.1 Offsite Passive Sampling:

3.1.1 Nitrogen Dioxide (NO₂) and Benzene (C₆H₆)

daa has installed a network of passive diffusion tube samplers in areas surrounding the airport. Monitoring locations are shown on Figure 1 and listed in Table 2. The diffusion tubes are exposed for approximately 4-week intervals and record monthly mean concentrations. Monthly mean concentrations are averaged to give an annual mean, presented in Figure 2. The tubes are analysed using UV Spectrophotometry at a UKAS (United Kingdom Accreditation Service) accredited laboratory. Results are expressed in $\mu g/m^3$ (micrograms per cubic metre).

3.2 Onsite Sampling

3.2.1 Equipment Calibration

An external expert service provider undertakes routine servicing of the DAP air quality monitoring equipment. During routine visits, air filters are replaced, and the instruments are calibrated to EPA gas standards. The technician also inspects the functionality of the station and sampling system. An emergency call out service is also provided by the service provider. The routine calibration process takes approximately 24 hours, data collection resumes after this 24-hour period. In Q1 2025, due to down times during calibration and power and connection issues with the equipment, 71% of NO₂, PM₁₀ and PM_{2.5} data was captured.

3.2.2 Nitrogen Dioxide (NO₂)

Onsite monitoring of NO_2 is carried out on a continuous basis at the stationary airport monitoring station. Measurement of NO_2 is carried out using a Horiba APNA-370 ambient NOx monitor which employs a crossflow modulated chemiluminescence method. The results are expressed in $\mu g/m^3$.

3.2.3 Particulate Matter (PM_{10}) and ($PM_{2.5}$)

PM $_{10}$ and PM $_{2.5}$ are defined as airborne particulate matter with an aerodynamic diameter equal to or less than 10µm and 2.5µm respectively. PM $_{10}$ and PM $_{2.5}$ are monitored on a continuous basis at the airport monitoring station. The PM $_{10}$ and PM $_{2.5}$ instruments automatically measure and record airborne particulate concentration levels using the principle of beta ray attenuation. The sampler monitors the PM $_{10}$ and PM $_{2.5}$ content of air by drawing a measured volume of air through a chamber containing a pre-conditioned and pre-weighed filter in accordance with the internationally accepted US EPA protocol for PM $_{10}$ and PM $_{2.5}$ sampling. The results are expressed in µg/m 3 .

4.0 Monitoring Results

4.1 Offsite NO₂ Monitoring Results

Figure 2 presents the annual mean NO_2 concentration for each location based on the monthly passive tube sampling. The Regulations mandate an annual mean limit value of 40 $\mu g/m^3$ for NO_2 . Upcoming 2030 regulatory limits and WHO AQGs interim and final targets are also included in the graph below. As can be seen from Figure 2, the mean NO_2 levels including at the bus depot sampling point A11 are currently below the annual regulatory limit. The monthly average for A11 for parameter NO_2 during Q1 was calculated at 35.14 $\mu g/m^3$. The higher level of NO_2 compared to other sites is related to the volume of vehicular traffic at this location.

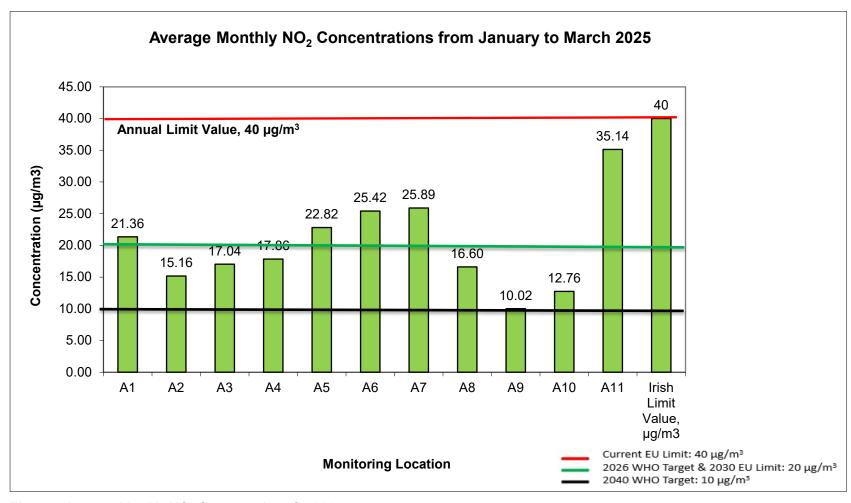


Figure 2 Average Monthly NO_2 Concentrations Q1 2025

4.2 Offsite Benzene Monitoring Results

Figure 3 presents the annual mean Benzene concentration for each location based on the monthly passive tube sampling. The Regulations mandate an annual mean limit value of 5 μ g/m³ for Benzene. As can be seen from Figure 3, the annual mean values were below the limit value of 5 μ g/m³ at all monitoring locations.


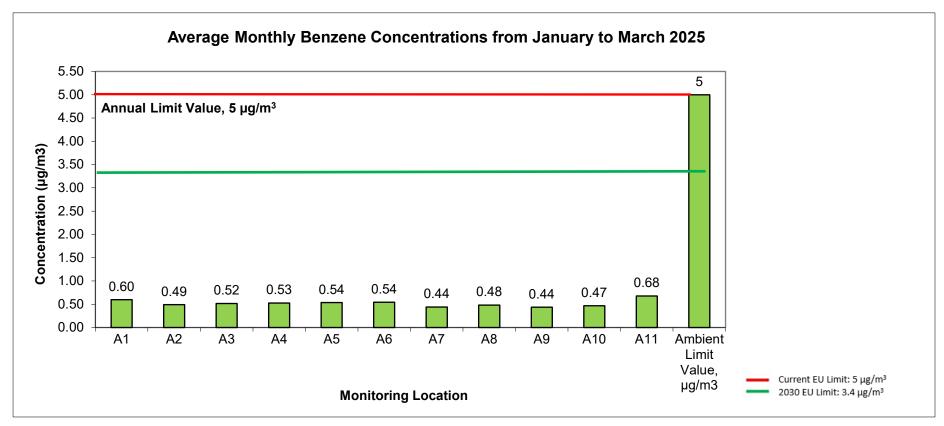


Figure 3 Average Monthly Benzene (C₆H₆) Concentrations Q1 2025

5.0 On-site Airport Monitoring Station Results


5.1 On-site Airport Monitoring Station Results: Daily Average NO₂

NO₂ concentrations are measured at the automatic on-site station at Dublin Airport. Figure 4 presents the daily average NO₂ concentrations measured during Q1 2025. The equivalent daily average was calculated as 30.1 µg/m³.

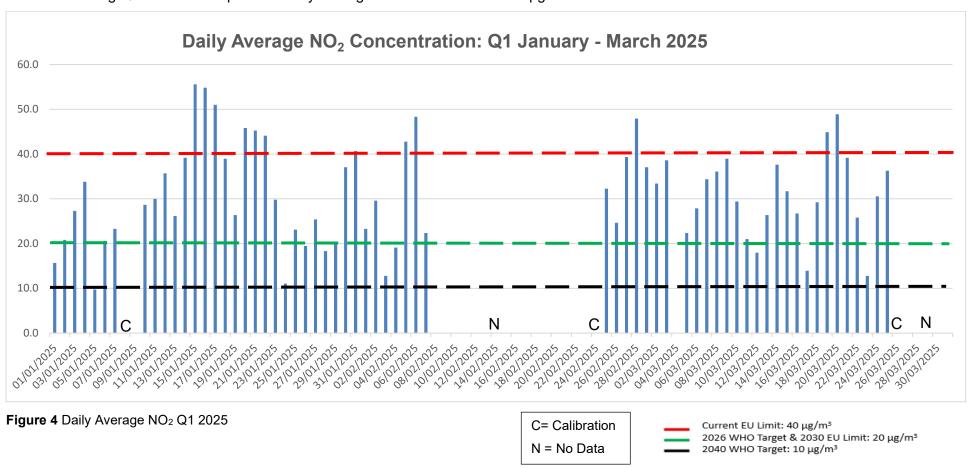


5.2 On-site Airport Monitoring Station Results: PM₁₀

Daily average PM_{10} concentrations recorded at the automatic station in DAP in Q1 2025 are presented in Figure 5. The average PM_{10} was calculated as 13.8 $\mu g/m^3$.

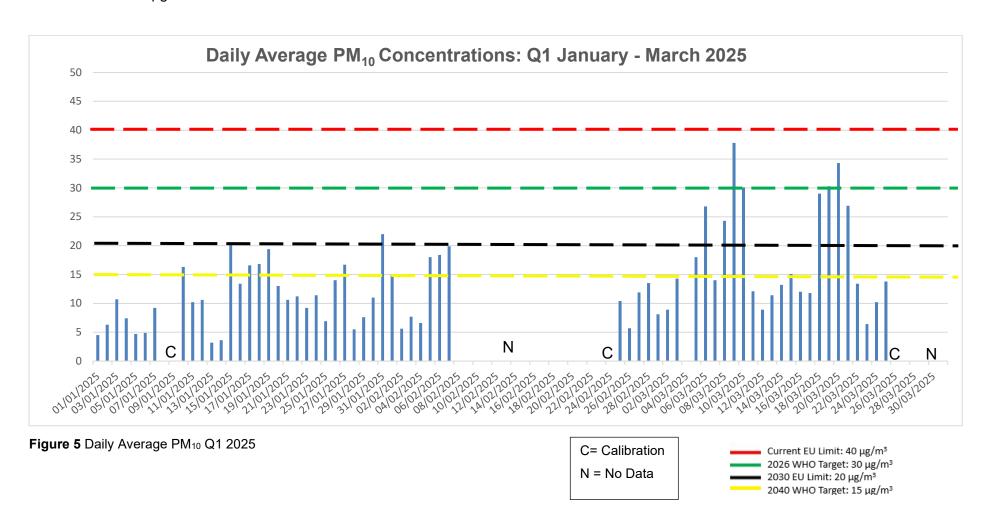

5.3 On-Site Airport Monitoring Station Results: PM_{2.5}

Daily average $PM_{2.5}$ concentrations recorded at the automatic station in DAP in Q1 2025 are presented in Figure 6. The average $PM_{2.5}$ was calculated as 8.1 μ g/m³.

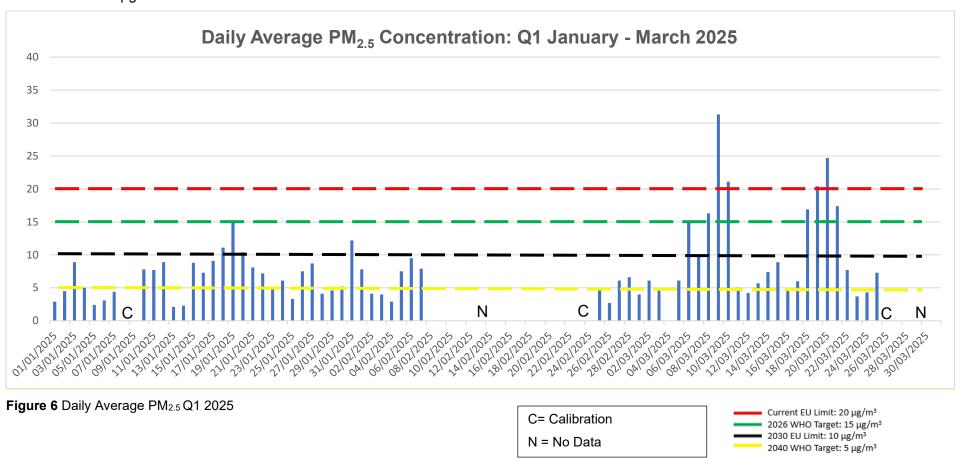

The Regulations set a 24-hour PM_{10} limit value of 50 $\mu g/m^3$ and an annual mean limit value of 40 $\mu g/m^3$ as shown in Table 3. There is no 24-hour limit value for $PM_{2.5}$ set in the Regulations. The annual mean limit for $PM_{2.5}$ is 20 $\mu g/m^3$.

Objective	Averaging Period	Limit or Threshold Value (µg/m³)	No. of Allowed Exceedances	No. of Exceedances (Year to date)
PM ₁₀ Limit Value	24 hour	50	Not to be exceeded on more than 35 days per year	0
PM ₁₀ Limit Value	Calendar Year	40	NA	NA
PM _{2.5} Limit Value	Calendar Year	20	NA	NA

Table 3 PM₁₀ and PM_{2.5} Limit Values

Air Quality Monitoring Dublin Airport: Q1 2025

Sustainability Department

6.0 Conclusion

Onsite Monitoring: The results of the NO_2 and PM_{10} concentrations using the online analyser indicate concentrations are below the relevant annual limit value of $40\mu g/m^3$ and within the

allowed criteria of short-term limit values. $PM_{\rm 10}$ and $PM_{\rm 2.5}$ results were also with limit values

to be achieved by 2030 under the revised CAFÉ Directive.

Offsite Monitoring: Diffusion tube results for NO2 indicate that the highest concentrations are

recorded at the bus depot (A11) at the airport. The bus depot at the airport is Ireland's

busiest bus depot. The elevated readings are related to the volume of vehicular activity that

occurs in the area.

Diffusion tube results for benzene indicate that concentrations at all locations are well below

the annual average limit value.

17